




15000F ATF Automatic Transmission Fluid Ford

Document version: Apr 22, 2024

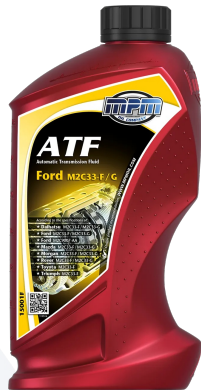

Description

This mineral automatic transmission oil has been specially developed for automatic transmissions, power steering, torque converters and other applications for which constructors specify an ATF Ford oil.

According to the specifications of

Daihatsu M2C33-F / M2C33-G
Ford M2C33-F / M2C33-G / M2C9007-AA
Mazda M2C33-F / M2C33-G
Morgan M2C33-F / M2C33-G
Rover M2C33-F / M2C33-G
Toyota M2C33-F
Triumph M2C33-F

Packaging units

ART. NR.	VOLUME	ITEMS PER UNIT	ITEMS PER PALLET
15001F	1 L	6	450
15020F	20 L	1	30
15060F	60 L	1	6
15205F	205 L	1	2
15999F	1000 L	1	-

Standard analyses

TEST	VALUE	METHOD
Density at 15°C	0.869	kg/l
Colour	red	
Viscosity	10W	
Kinematic Viscosity at 40°C	34.9	mm ² /s
Kinematic Viscosity at 100°C	7.21	mm ² /s
Viscosity Index	177	
Flashpoint COC	195	°C
Pourpoint	-41	°C

These characteristics are typical of current production. Variations in these characteristics may occur.